

## COSMOS 350X

### Digital servodrive

#### Description

High-performance digital servodrive, available for both brushless and asynchronous motors. Designed for challenging applications on modern machinery, it offers extraordinary flexibility thanks to reliable real-time buses, sophisticated control algorithms, flexibility on motors and encoders, integrated braking resistor and Safe Torque Off SIL-2 function. Available with SERCOS III™ and proprietary FLXIO™ interfaces for demanding real-time applications or standard Ethernet where timings are not paramount.




#### Smittec S.p.A.

Via Carlo Ceresa, 10 - 24015 San Giovanni Bianco (BG) ITALY  
Tel. +39 0345 40.111 - [www.smittec.it](http://www.smittec.it)  
P.I.: 04471940165 - C.F.: 03942700166

Technical data	
Housing material	PBT + GF
Degree of protection	IP20
Type of motors	Asynchronous three-phase or brushless (depending on version)
Continuous output current	18 A <sub>RMS</sub>
Peak output current	50 A
Brake control	Available (depending on version)
Safety functions	Integrated STO (Safe Torque Off) function (SIL-2) available
Auxiliary voltage	24 V <sub>DC</sub>
Feedback inputs	Incremental encoders (differential 5 V or 24V HTL outputs) or Hiperface encoders, depending on version
User interface	Optional detachable VISIO (keypad and display interface) for parameter setup and data visualization; USB port (device mode) for FW update and debug
Bus interface	SERCOS III™, Ethernet or proprietary FLXIO™
Electrical specifications	Main supply: 3 phase, 230÷460 V <sub>AC</sub> Auxiliary supply: 24 V <sub>DC</sub> -15%÷+10%
Environmental specifications	Operating temperature from +0°C to +55°C (no derating up to 40°C) Relative humidity from 5% to 85% (non condensing)

## Dimensions

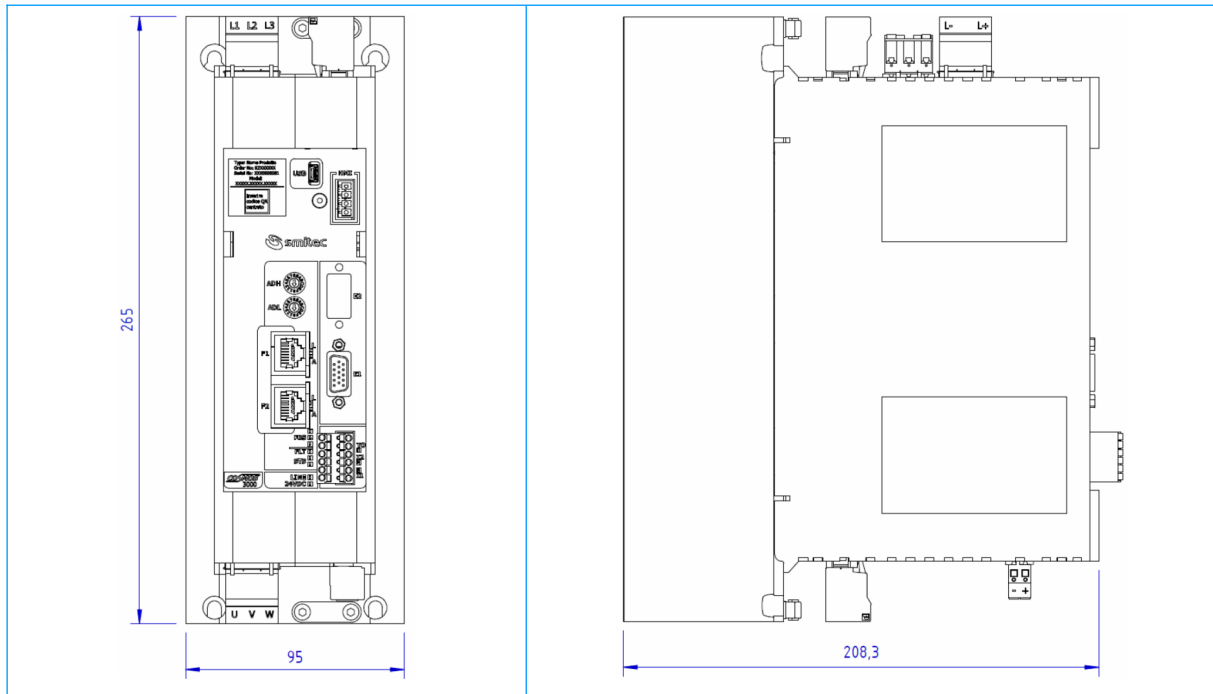

Data here mentioned are subject to changes without any notice.