



ACS 01

**FLXMOD**

## FLXIO™ adapter module

### Description

FLXMOD™ system adapter for FLXIO™ bus. This unit, designed for mounting on a standard DIN rail and housed in a compact plastic case, create an external access to the backplane by a standard RJ45 connector, thereby allowing an external bus branch.




#### **Smittec S.p.A.**

Via Carlo Ceresa, 10 - 24015 San Giovanni Bianco (BG) ITALY  
Tel. +39 0345 40.111 - [www.smittec.it](http://www.smittec.it)  
P.I.: 04471940165 - C.F.: 03942700166

### Technical data

Housing material	Polypropylene
Degree of protection	IP20
External bus connector	RJ45
Recommended cable for FLXIO™ bus	Straight CAT 5E Ethernet cable
Interface	Proprietary FLXIO™
Environmental specifications	Operating temperature: from +5°C to +55°C Storage temperature: from -25°C to +85°C Relative humidity: from 10% to 95% (non condensing)

### Dimensions

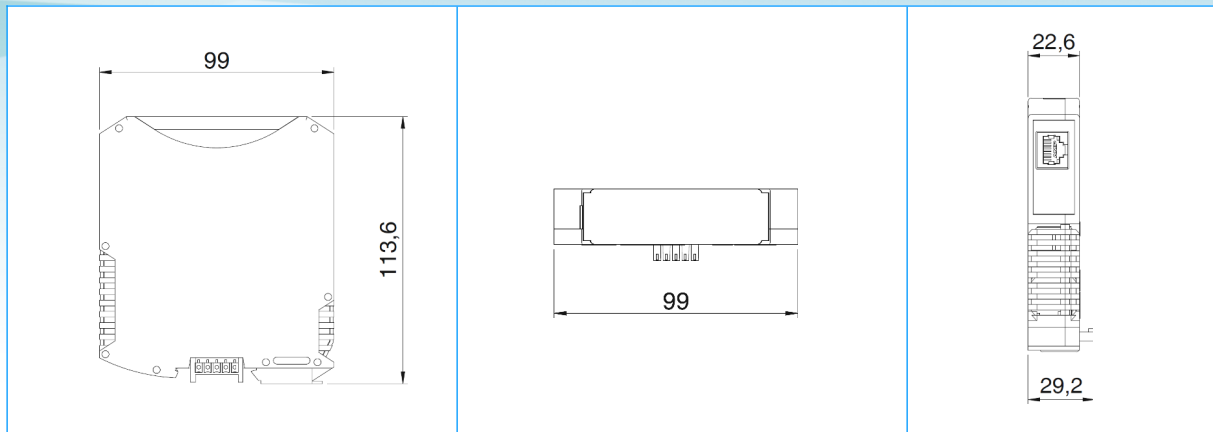

Data here mentioned are subject to changes without any notice.