

HMI POSYC 4300

Industrial Panel PC

Description


POSYC 4300 is an industrial panel PC based on Intel x86 dual core architecture and equipped with a 15" 24bits colour display and high reliable touch screen. Advanced ergonomics design, iconstyle, user-friendly technology; it is designed to facilitate human machine interface (HMI) in industrial environments. Its powerful processor and lots of features available, make it ideal for many applications. VESA compliant arm or panel mount options. Rugged buttons control panel option.



P.I.: 04471940165 - C.F.: 03942700166

Technical Data Architecture Available OS MS Windows 10loT / Linux Housing material Alminum Degree of protection IP65 Processor Intel® Celeron N3160 Quad-Core (1.60GHz) Memory 4GB DDR3 1066MHz RAM Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD - high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from -20°C to +50°C Storage temperature: from 0% to 90% (non-condensig) Certifications CE, cULus		
Available OS Housing material Degree of protection Processor Intel® Celeron N3160 Quad-Core (1.60GHz) Memory 4GB DDR3 1066MHz RAM Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD – high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from+0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Technical Data	
Housing material Degree of protection IP65 Processor Intel® Celeron N3160 Quad-Core (1.60GHz) Memory 4GB DDR3 1066MHz RAM Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD - high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from+0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Architecture	x86
Degree of protection Processor Intel® Celeron N3160 Quad-Core (1.60GHz) Memory 4GB DDR3 1066MHz RAM Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD - high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from+0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Available OS	MS Windows 10IoT / Linux
Processor Intel® Celeron N3160 Quad-Core (1.60GHz) Memory 4GB DDR3 1066MHz RAM Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD – high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from+0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Housing material	Alminum
Memory Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD - high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from +0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Degree of protection	IP65
Display 15" colour LED TFT,1024x768,16.2M colors Touch screen 5 wires - HD – high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from +0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Processor	Intel® Celeron N3160 Quad-Core (1.60GHz)
Touch screen 5 wires - HD - high endurance 35 million touches at one point Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from +0°C to +50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Memory	4GB DDR3 1066MHz RAM
Connections 2 x external USB (front side) 4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Power Supply: 24V _{DC} Environmental specifications Operating temperature: from +0°C to +50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Display	15" colour LED TFT,1024x768,16.2M colors
4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio 1 x Cfast Socket Electrical specifications Environmental specifications Operating temperature: from+0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Touch screen	<u> </u>
Environmental specifications Operating temperature: from+0°C to+50°C Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Connections	4 x USB 2 x Gigabit LAN 1 x DVI-T 1 x COM RS485 2 x COM RS232 1 x HDMI 1 x Audio
Storage temperature: from -20°C to +60°C Relative humidity: from 0% to 90% (non-condensig)	Electrical specifications	Power Supply: 24V _{DC}
Certifications CE, cULus	Environmental specifications	Storage temperature: from -20°C to +60°C
	Certifications	CE, cULus

Dimensions

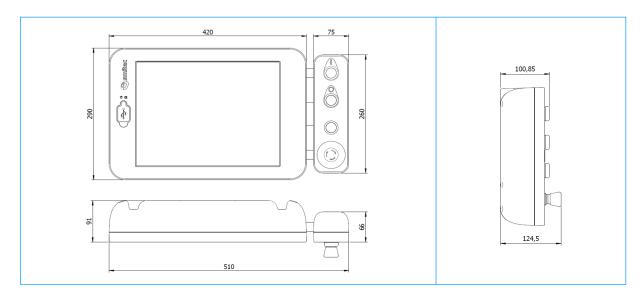

Data here mentioned are subject to changes without any notice.



P.I.: 04471940165 - C.F.: 03942700166