


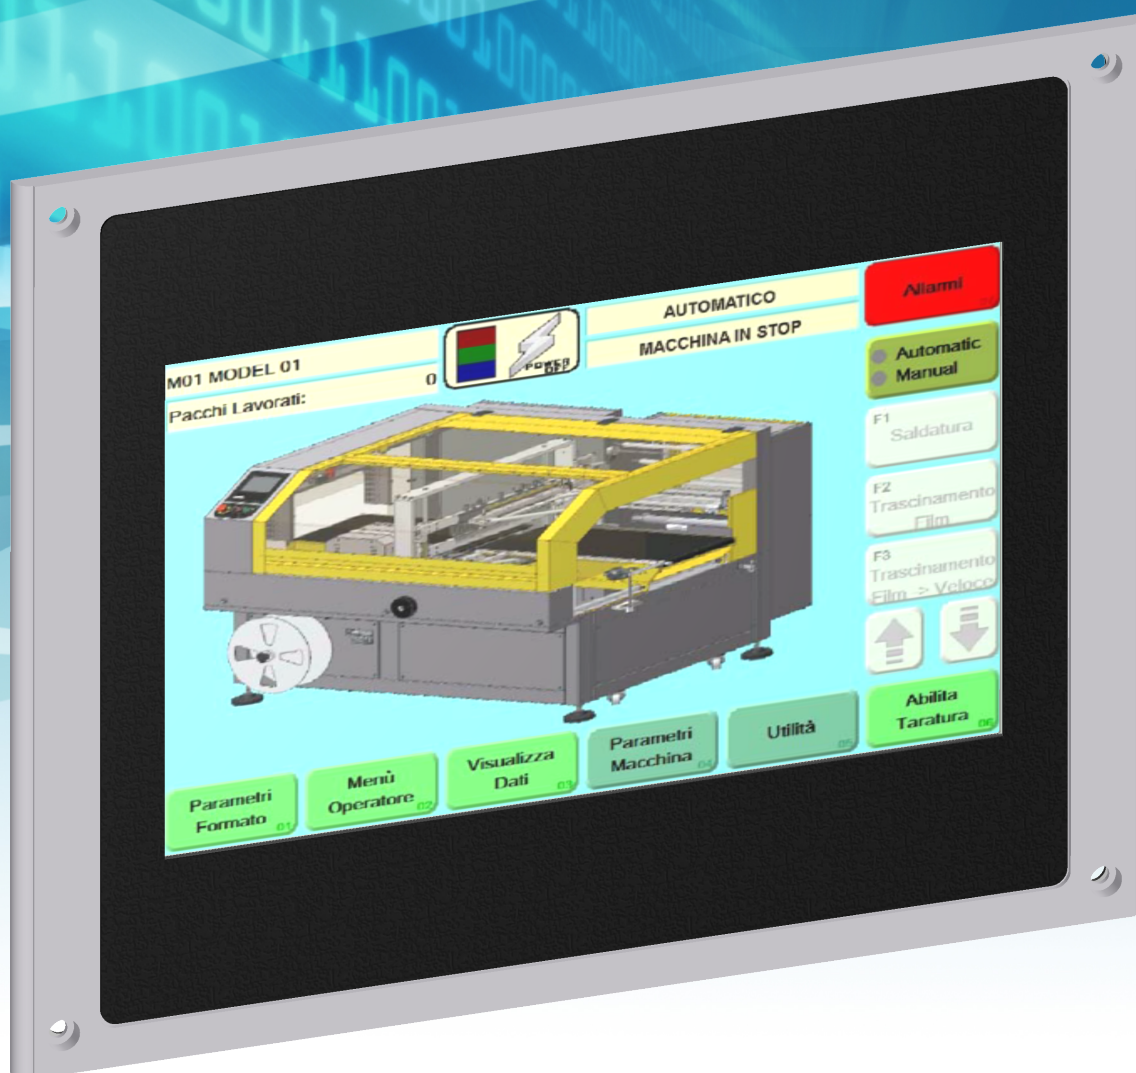

HMI B1

FLXMOD


Graphical machine interface

Description

Machine interface module, equipped with a 7" color display and a touch-screen interface. This unit, designed for panel mounting and housed in a rugged metal case, is designed especially to work in conjunction with FLXMOD system master modules.

Technical data	
Housing material	Aluminum and steel
Degree of protection	IP65 (when flush mounted)
Display	7" with 800x480 pixels resolution
Color depth	18 bit (262k colors)
Touch-screen	Four wires type
Interface with master modules	Proprietary SDVL (SMITEC Digital Video Link)
Other ports	One USB 2.0 type A general purpose port
Electrical specifications	Power supply: 24V _{DC}
Environmental specifications	Operating temperature: from +5°C to +55°C Storage temperature: from -30°C to +85°C Relative humidity: from 10% to 95% (non condensing)

Dimensions

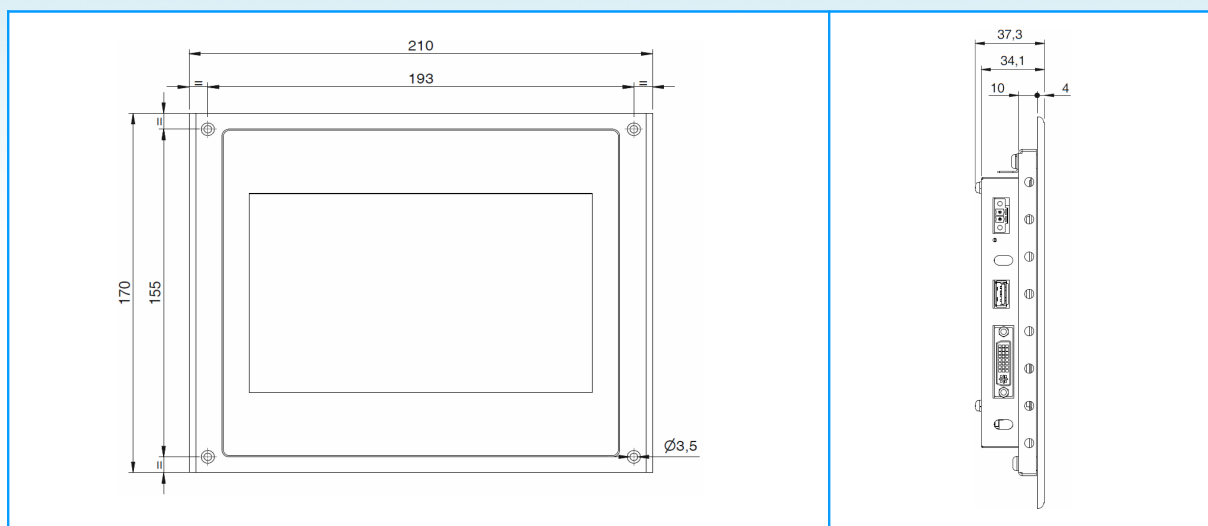

Data here mentioned are subject to changes without any notice.