



ACS 01

FLXMOD

FLXIO™ adapter module

Description

FLXMOD™ system adapter for FLXIO™ bus. This unit, designed for mounting on a standard DIN rail and housed in a compact plastic case, create an external access to the backplane by a standard RJ45 connector, thereby allowing an external bus branch.



Smitec S.p.A.


Viale Vittorio Veneto, 4 - 24016 San Pellegrino Terme (BG) ITALY
Tel. +39 0345 40.800 - Fax: +39 0345 40.809 - www.smitec.it

Head office:

Via Carlo Ceresa, 10 - 24015 San Giovanni Bianco (BG) ITALY
C.F. e P. IVA IT03790400166

Technical data	
Housing material	Polypropylene
Degree of protection	IP20
External bus connector	RJ45
Recommended cable for FLXIO™ bus	Straight CAT 5E Ethernet cable
Interface	Proprietary FLXIO™
Environmental specifications	Operating temperature: from +5°C to +55°C Storage temperature: from -25°C to +85°C Relative humidity: from 10% to 95% (non condensing)

Dimensions

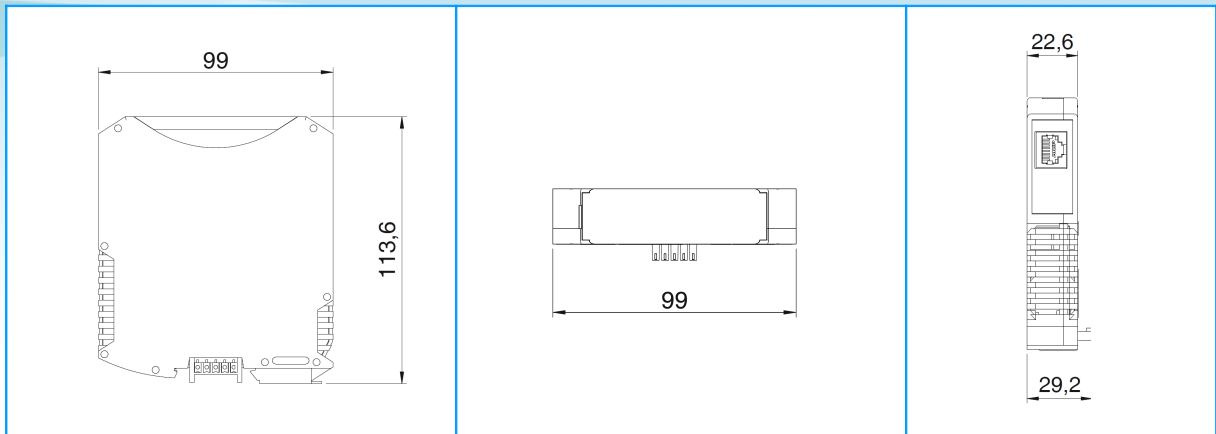

Data here mentioned are subject to changes without any notice.